
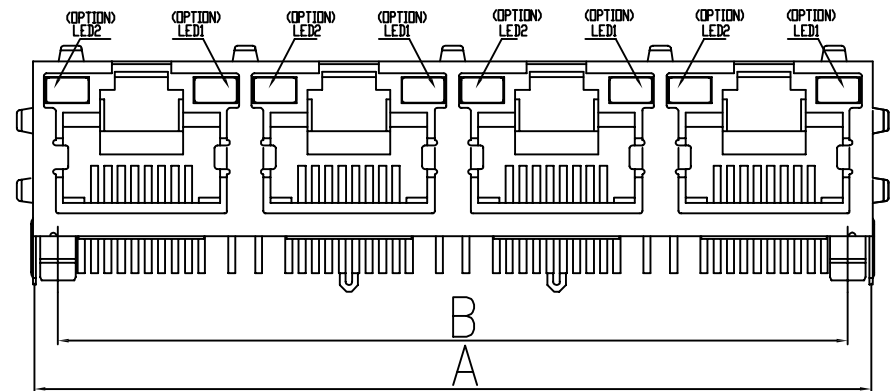
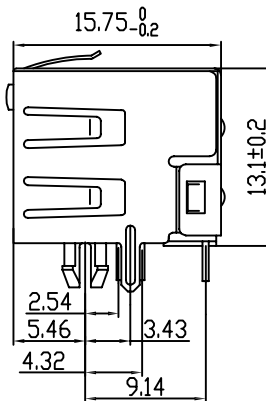
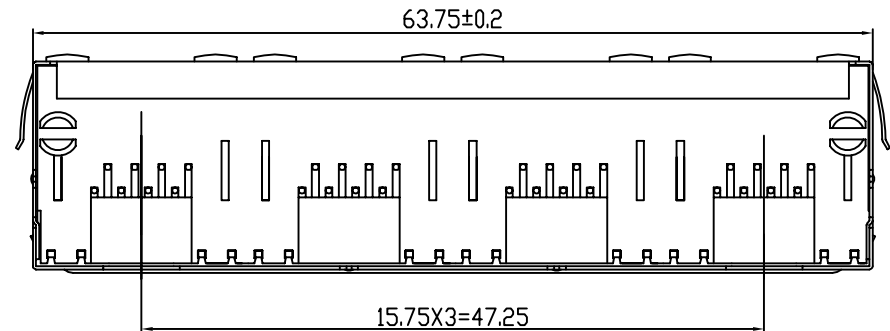


REV. NO.	REVISION NOTE	DATE	SIGNATURE	CHECKED

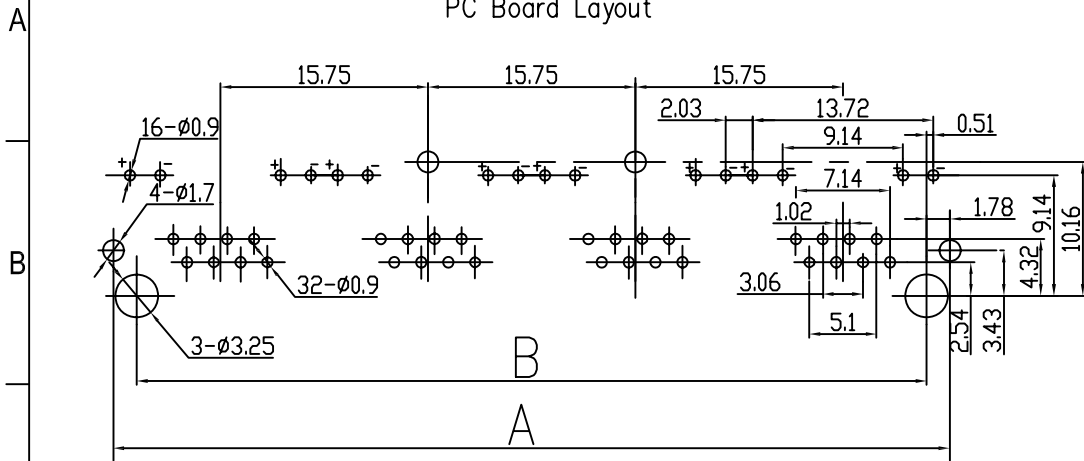

PCB JACK Specification

1. Insulation Resistance: 500MΩMIN @ 500 VDC
2. Withstanding Voltage: AC1000V 50Hz or 60Hz 1min.
3. Durability: 600 Mating Circles MIN.
4. Gold Plating: (3; 6; 15; 30; 50)u inch
5. Tolerances Unless Otherwise Specified
 .0±0.25 .00±0.20 .000±0.10

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE

S881-1*4-LED-XX-C	1*4	63.51	59.95
S881-1*2-LED-XX-C	1*2	32.0	28.45
S881-1*1-LED-XX-C	1*1	16.25	12.70
ITEM NO.	POLES	A	B

AMTAC 东莞圣讯电子科技有限公司
AMTAC TECHNOLOGY CO.,LTD

TITLE RJ45 8P8C PCB JACK WITH LED

SCALE PART NO. S881-1*X-LED-XX-C

UNIT FIT mm DWG. NO. REV. NO. A

SHEET 1/1 DRAWN Fly-xing CHECK APPROVE

CUSTOMER - ITEM NO. - DATE Aug.10, 2010